

# MECHANIC IN A BOTTLE HYDRAULIC OIL FIX & STABILIZER



**Fixes & Stabilizes Emulsified Oil** 

### **Prevent Problems • Fix Oil • Flush & Clean Oil System**

**PROBLEM:** All oils, including new oils, are affected by water. Bound water in oil has no lubrication (stiction, loss of productivity). Dissolved water molecules (polar) actively seek other polar molecules, including metals, additives such as detergents, antioxidants, friction modifiers, and anti-wear additives. Water will come out of suspension and form

white gummy masses in various areas of the unit (can not be flushed). Any oil with water exceeding 300 PPM is corrosive leading to rust, hydrolysis, sludge. Emulsified water can cause oil to behave unexpectedly, and can cause clogged filters, and increased oil acidity.

**SOLUTION:** Mechanic In A Bottle Hydraulic Oil Fix & Stabilizer can FIX and PREVENT emulsified oils so that equipment runs and operates at maximum efficiency. It will FIX milky, contaminated hydraulic oil and improve machine performance.

## **WORKS IN ALL OILS**

HYDRAULIC, ENGINE (CONVENTIONAL, SYNTHETIC), GEAR, TRANSMISSION, POWER STEERING, TRANSFER CASE, TURBINE, COMPRESSOR, DIFFERENTIAL, MORE.

- **♦ STABILIZES OIL**
- **▲** OIL SYSTEM FLUSH
- **ADDS LUBRICITY**
- **♦ RESTORES VISCOSITY**
- **♦** ANTI-CORROSION
- **♦ NEUTRALIZES ACIDS**
- ENCAPSULATES WATER
- **♦** HELPS FIX EMULSIFIED OIL
- ◆ INCREASES BASE NUMBER
- **♦ HELPS CLEAN OIL SYSTEM**
- **▲ PATENT PENDING**

#### **Does not contain harmful:**

- Petroleum Distillates
- Alcohol
- Glycol Ethers



Scan with phone camera & click on link that pops up for live test and demo



BEFORE TREATMENT:



AFTER TREATMENT:



AVAILABLE IN 24 & 128 OZ. CALL FOR OTHER SIZES










## **B3C TECHNICAL BULLETIN**



#### PRODUCT: MECHANIC IN A BOTTLE HYDRAULIC OIL FIX & STABILIZER

## WHY IT IS IMPOSSIBLE TO GET EMULSIFIED OIL / WATER OR **DEF\* OUT OF YOUR HYDRAULIC SYSTEM**

PROBLEM: Oils and/or DEF\* become emulsified (water contaminated) through leaks, condensation, user error and more. This emulsified oil (or DEF) increases in viscosity, clinging to all the intricate areas within the hydraulic system and clogs the oil cooler turbulators. It is impossible to clean or remove through flushing, and will continue to come back. \*Accidental DEF contamination is one of the most damaging problems and must be addressed immediately.

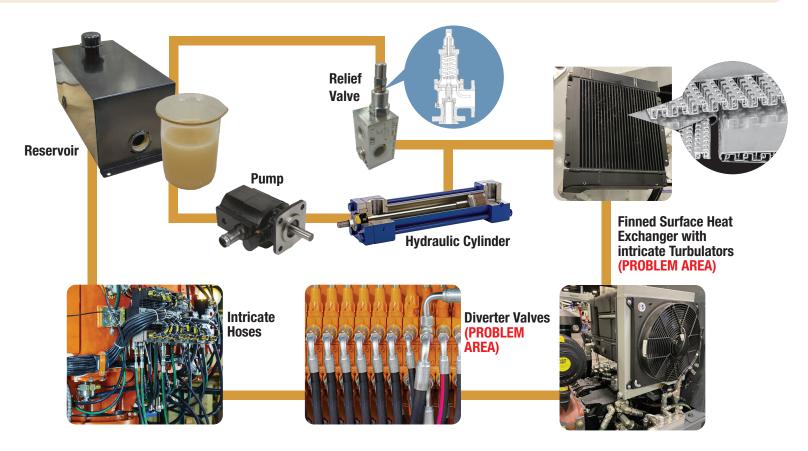

SOLUTION: Mechanic In A Bottle Hydraulic Oil Fix is the WORLD'S ONLY solution that reaches into all of these intricate areas to encapsulate the water, allowing you to clean, flush, and restore the entire hydraulic system.

- STABILIZES OIL
- **♦ OIL SYSTEM FLUSH**
- ADDS LUBRICITY
- RESTORES VISCOSITY
- ANTI-CORROSION
- NEUTRALIZES ACIDS
- RESTORES LOST PRESSURE AND POWER
- ▲ ENCAPSULATES WATER
- HELPS FIX EMULSIFIED OIL
- ♠ INCREASES BASE NUMBER
- HELPS CLEAN OIL SYSTEM
- **♦ PATENT PENDING**







TREATMENT:





**B3C FUEL SOLUTIONS** PHONE: 843. 347. 0482 FAX: (866) 929-7173 B3CFuel.com



**Fix & Prevent** Fuel & Oil Related Issues

For our FULL CATALOG, place your phone camera over the image to the right, then click the link that pops up. Or enter https://bit.ly/B3Ccatalog in any web browser.

