


NEW OIL AND OIL IN STORAGE OFTEN CONTAIN HIGH LEVELS OF BOUND WATER. DRYZOIL MOLECULAR WATER ABSORBERS KEEP OIL DRY, FRESH, & STABILIZED.

PROBLEM: Most new oil and oil in storage have unacceptable levels of bound water contamination. This problem continues to get worse over time. This “out of specification” oil ends up in the equipment’s hydraulic system, leading to sluggish performance and costly internal component damage.


1. NEW OIL CONTAINING BOUND WATER

New oil contains HIGHER than acceptable levels of water.

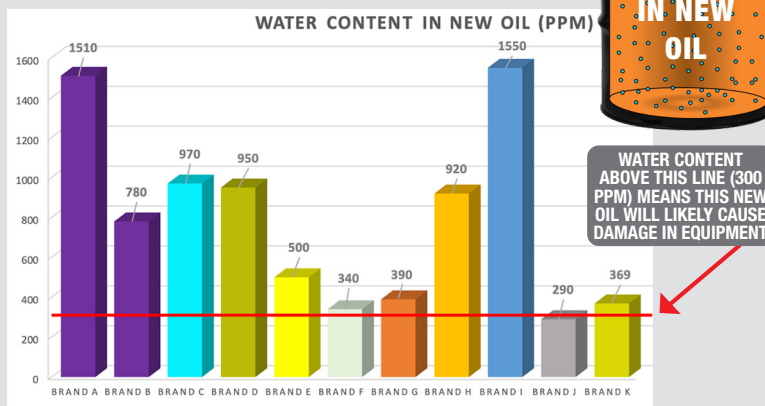

2. OIL IN STORAGE GATHERS MORE WATER


Water increases in new oil over time due to temperature changes (hot / cold), condensation, air ingress, and more.

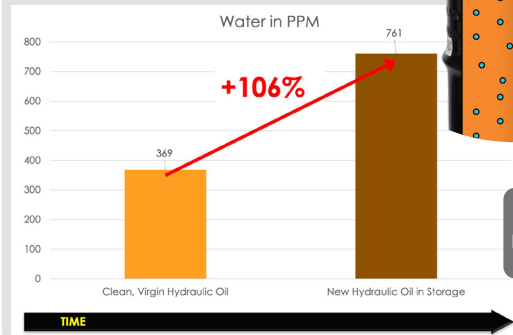

3. WATER CONTAMINATED OIL ON MACHINE

Oil with high levels of bound water that is out of specification ends up in the equipment tank and hydraulic system as the same negative forces continue to increase contamination.

WATER CONTINUES TO MAKE ITS WAY INTO THE HYDRAULIC TANK & SYSTEM

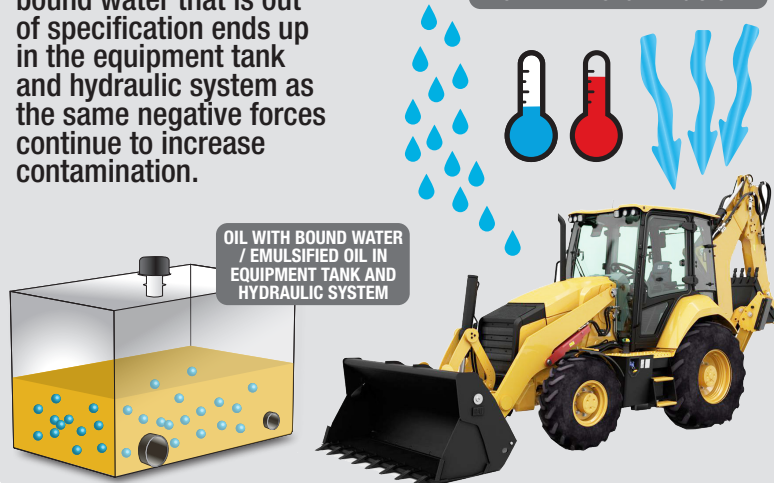

4. DAMAGE CAUSED BY WATER IN OIL

This water contaminated oil has higher viscosity, plugs filters, increases stiction, causes sluggish performance and results in costly internal component damage.




Bearing Failure




Seal Damage, Leaks



Rust



Blown Hoses



Scoring, Erosion




Dirty Filters

* NOTE: Always start with clean, dry oil. If emulsified, water contaminated oil is found, ask us about **Mechanic In A Bottle Oil Fix & Stabilizer** to FIX contaminated oil.

Remove the Water, Remove the Problems

www.B3Cfuel.com

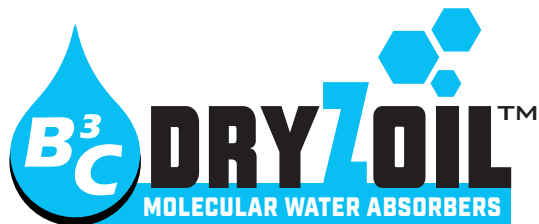

SOLUTION: MOLECULAR WATER ABSORBERS FOR OIL IN STORAGE (DRIES OIL)

- 1 PART DZ-24: USE IN 55 GAL OIL DRUMS IN STORAGE
- SIZE 24" LENGTH X 2" DIAMETER**



KEEPS OIL IN STORAGE DRY, FRESH, & STABILIZED

- REMOVES WATER IN OIL DURING STORAGE
- HELPS STABILIZE OIL
- SIMPLE TO USE;
LOW COST
- DISPOSABLE

- 2 PART DZ-48: USE IN 275 GAL OIL TOTE IN STORAGE
- SIZE 48" LENGTH X 2" DIAMETER**



**OLEOPHOBIC
COATING**

**Oil resistant
coating**

OIL DESICCANT
**Absorbs water
from oil**



B3C FUEL SOLUTIONS
PHONE: 843. 347. 0482
FAX: (866) 929-7173

Remove the Water, Remove the Problems
www.B3Cfuel.com

